

🇮🇹 PUNTE COMPONIBILI


Corte e Lunghe

Punte tipo C-L in HSS Gruppo 0-1-2 dal Ø 4,2 al Ø 25 HRC 63.
Possono essere montate su tutti i mandrini Polledri nell'ambito dello stesso gruppo. Queste punte tipo corto o lungo, combinate con le Frese Frontali o con Frese a svasare, permettono di eseguire direttamente 'foro + incassatura' o 'foro + svasatura', fungendo contemporaneamente da guida all'utensile combinato essendo cilindriche sulla loro parte terminale.
L'uso di un buon lubrificante aumenta sensibilmente la durata dell'utensile.

🇬🇧 INTERCHANGEABLES DRILLS

Short Type or Long Type

Drills type C-L group 0-1-2 in HSS hardness 63 HRC from Ø 4,2 to Ø 25.
You can fit them in all the Polledri holders of the same group. Fitting them in the counterbores and countersinks you can to drill and to counterbore or to countersink simultaneous. Using a good soluble oil you can increase the speed, with an increase of the tool life.

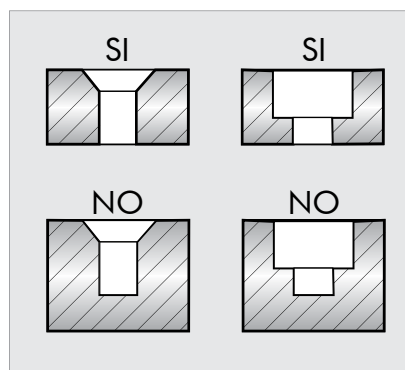

IMPORTANTE

Su ogni fresa è possibile montare una guida o una punta, in questo secondo caso l'utensile può lavorare solo fori passanti e non fori ciechi. La lunghezza dell'elica della punta deve essere tale per cui esca dal foro prima che la fresa inizi a lavorare.

IMPORTANT

On each counterbore it is possible to mount a pilot or a drill, in this second case, the tool can only work through holes and not blind holes. The length of the tip propeller must be such that it comes out of the hole before the counterbore starts working.

🇮🇹 GUIDE COMPONIBILI

Fisse o Rotanti

Guide tipo F-R in Acciaio Cementato, temprato e rinvenuto HRC 60 gruppo 0-1-2 dal Ø 4 al Ø 52.
Possono essere montate su tutti i mandrini Polledri nell'ambito dello stesso gruppo. La vasta gamma di misure intere e decimali disponibili a catalogo permette di eseguire fresature frontali o svasature su fori dai diametri più comunemente usati nell'industria meccanica.

🇬🇧 INTERCHANGEABLES PILOTS

Fixed or Rotating

Pilot type F-R group 0-1-2 in carburized and hardened steel with hardness 60HRC group 0-1-2 from Ø 4 to Ø 52. You can fit them in all the Polledri holders of the same group. The large range of pilot sizes permit you to guide most counterbores and countersinks in general use.

